

Field Displacement in a Traveling-wave Ring Resonator Meta-structure

Toshiro Kodera¹, Dimitrios Sounas², Hoang Van Nguyen², Hadi Razavipour², and Christophe Caloz²

¹Yamaguchi University, 755-8611 Ube, Japan, kodera2t@ieee.org

²Poly-Grames Research Center, Department of Electrical Engineering, and the Centre de Recherche en Électronique Radiofréquence (CREER), École Polytechnique de Montréal, Montréal, QC, H2T 1J3, Canada

Abstract

Field displacement is demonstrated for the first-time in a non-molecular-scale structure, namely a meta-structure composed of rings equipped with an isolator. The structure is explained in terms of rotating magnetic dipole moments and demonstrated to produce typical gyrotropic field displacement.

1 Introduction

Gyrotropy and subsequent non-reciprocal effects generally require molecular-scale materials [2], such as ferrites or plasmas. This paper introduces a novel meta-structure composed of rings equipped with an isolator achieving gyrotropy from macroscopic “artificial spins,” and demonstrates by full-wave simulation that this structure supports the field-displacement effect [1] following from this artificial gyrotropy.

2 Traveling-Wave Ring Resonator

Fig. 1 depicts the unit cell of the ring resonator meta-structure, whose isolator is typically realized with a FET transistor biased in its common source configuration featuring a phase shift of π .

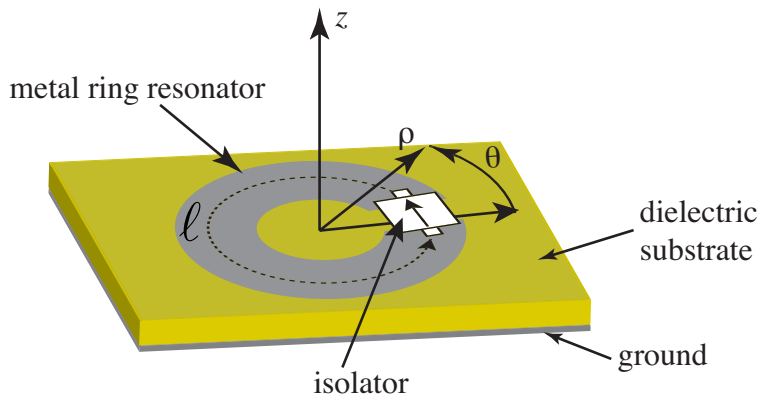


Figure 1: Unit cell of the proposed field-displacement traveling-wave ring resonator meta-structure

Fig. 2 represents the classical first resonance of a ring resonator without isolator, where the superposition of two waves azimuthally traveling in opposite directions gives rise to a standing wave. The insertion of an isolator in the ring, as in Fig. 1, suppresses one of the two waves, which leads to a traveling-wave regime, as illustrated in Figs. 3 and 4 at the first two resonances. Taking into account the π phase shift of the isolators, these two resonances correspond to circumferential lengths of $l = \lambda/2$ (Fig. 3) and $l = 3\lambda/2$ (Fig. 4), respectively.

3 Magnetic Dipole Moment and Gyrotropy

Figs. 5 and 6 show the field distributions along the ring at quarter-period spaced instants for the resonances of Figs. 3 and 4, respectively. They show that a rotating magnetic dipole moment \mathbf{m} is generated in

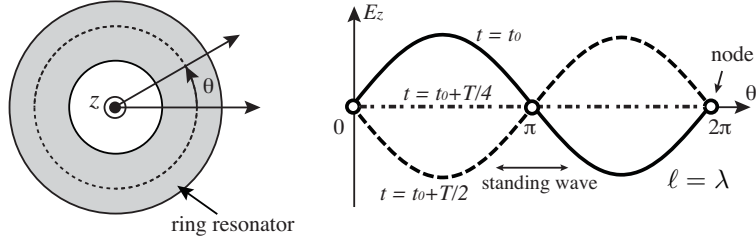


Figure 2: Conventional ring resonator, supporting a standing wave, and first resonance mode, $\ell = \lambda$.

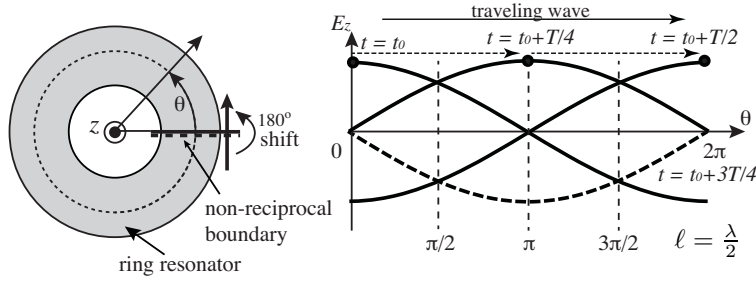


Figure 3: Proposed ring resonator with a localized isolator with π phase shift, supporting a traveling wave, and first resonant mode, $\ell = \lambda/2$.

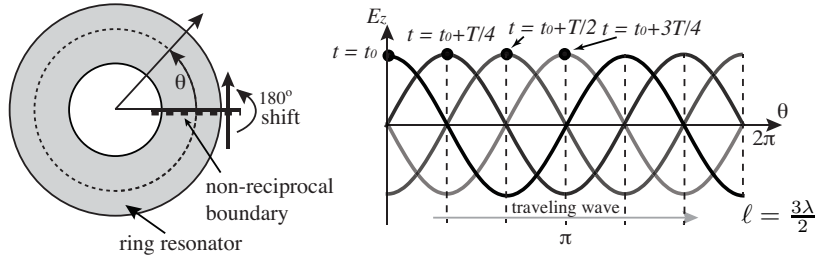


Figure 4: Proposed ring resonator as in Fig. 3 but excited in its second resonance, $\ell = 3\lambda/2$.

the ring as a result of the azimuthal unidirectionality of the wave propagation along it. As suggested by the figures, the variation of the magnitude of \mathbf{m} is smaller at the second resonance, which is therefore expected to produce a stronger gyrotropic effect on the incident wave.

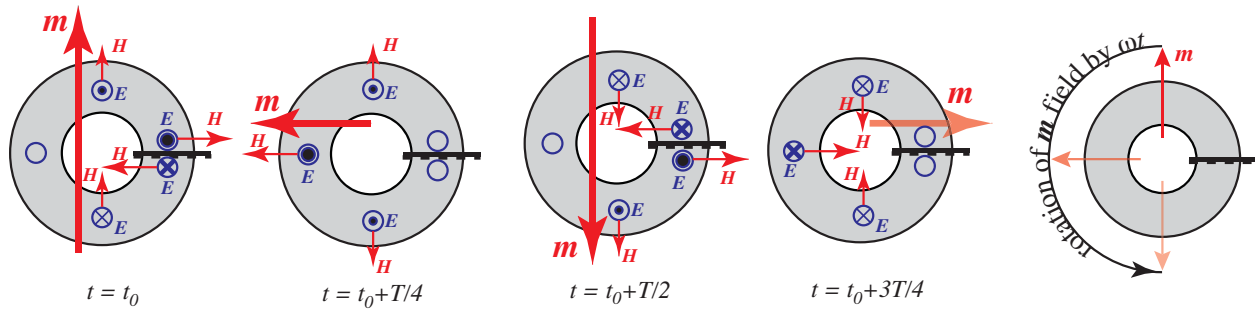


Figure 5: Gyrotropy related to a rotating magnetic dipole moment \mathbf{m} at the first resonance, $\ell = \lambda/2$ (case of Fig. 3)

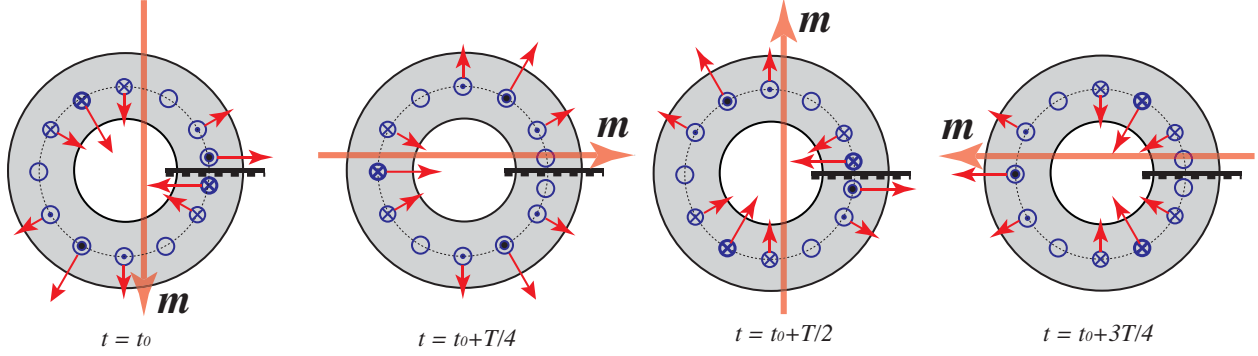


Figure 6: Gyrotropy related to a rotating magnetic dipole moment \mathbf{m} at the second resonance, $\ell = 3\lambda/2$ (case of Fig. 4).

4 Field Displacement Result

Gyrotropy usually leads to the phenomenon of field displacement [1]. It is therefore expected that a meta-structure (not necessarily effective, i.e. not necessarily a meta-material) formed by a collection of rings equipped with an isolator will produce this effect. To verify this, the two-ring waveguide structure depicted in Fig. 7 is full-wave simulated, and the resulting transmission parameters and cross-sectional fields are plotted in Figs. 8 and 9, respectively. Fig. 8 shows the first three resonances ($\ell = \lambda/2, 3\lambda/2, 5\lambda/2$), while Fig. 9, showing power concentrations in opposite sides for the propagation in opposite directions, demonstrates the anticipated field-displacement phenomenon.

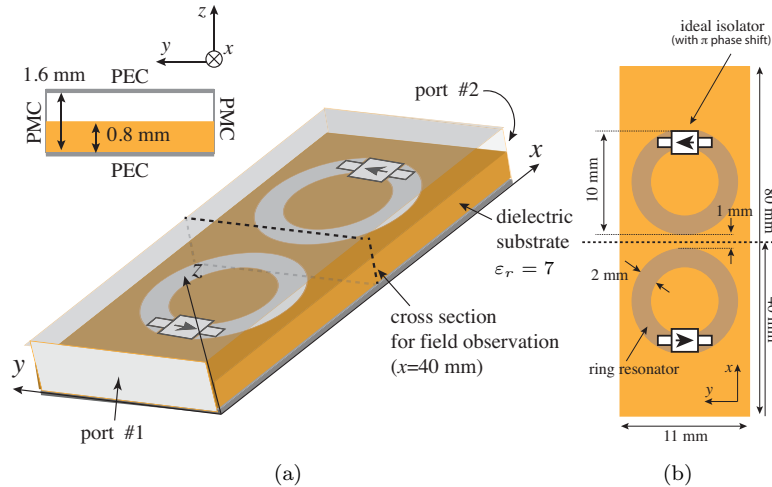


Figure 7: Ring meta-surface in a parallel-plate waveguide for the demonstration of the field-displacement phenomenon (full-wave simulation set-up).

5 Conclusion

Field displacement has been demonstrated for the first-time in a non-molecular-scale structure, namely a meta-structure composed of rings equipped with an isolator. Many applications are anticipated due to the MMIC compatibility of the structure.

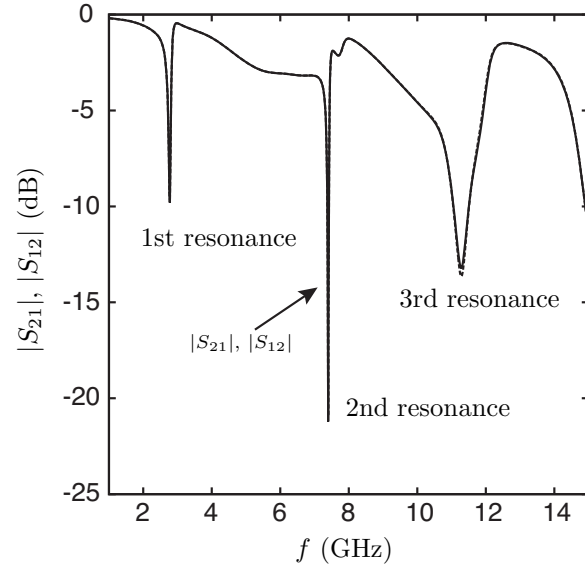


Figure 8: Transmission characteristics for the waveguide meta-structure of Fig. 7 (FIT CST Microwave Studio).

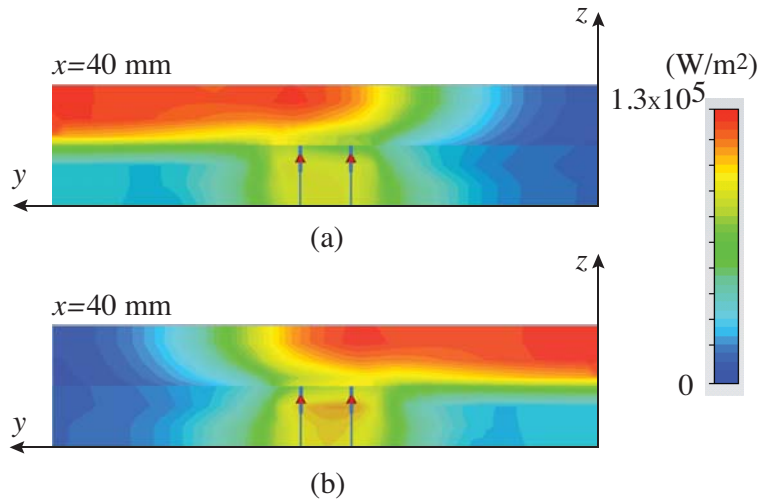


Figure 9: Cross-sectional magnitude of the Poynting vector at the position indicated in Fig. 7. (a) Port #1 excitation. (b) Port #2 excitation.

Acknowledgments

This work has been carried out under the sponsorship of the NSERC Strategic Project Grant # 1014 and KAKENHI Grant-in-Aid for Research Activity Start-up # 22860043. The authors would like to acknowledge CST Corporation for their generous donation of CST software licenses.

References

- [1] J. Adam, L. Davis, G. Dionne, E. Schloemann, and S. Stizer, "Ferrite devices and materials," *IEEE Trans. Microwave Theory Tech.*, vol. 50, no. 3, pp. 721–737, March 2002.
- [2] A. Gurevich, G. Melkov, "Magnetization Oscillations and Waves," CRC Press, Sept. 1996.